

Design Sheet - Iседio ArmourJoint Adjustable/Fixed

Please provide: contact details; project details; design conditions; load information

Contact Details

Contact Name

Company

Office Address

.....

.....

Tel.

Fax

Email

Project name and town.

Design Conditions

Concrete strength (C20/25 min).....


Max joint width (30mm max) (F).....

Slab thickness (T).....

For ArmourJoint Fixed only

- Position the dowel at the mid-height of the slab
- or
- Position the dowel at _____mm from the top of the slab


Iседio ArmourJoint Adjustable

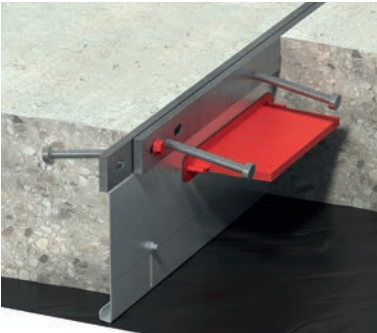


Load Information

Location Reference	Ultimate Load (kN/m)	Joint Length	Slab Thickness


Iседio ArmourJoint Fixed

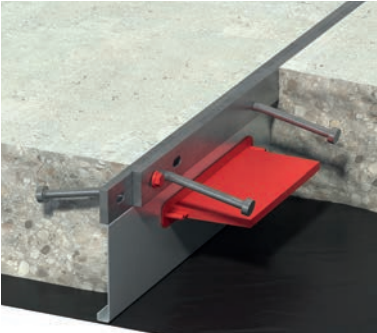

Corner Intersection

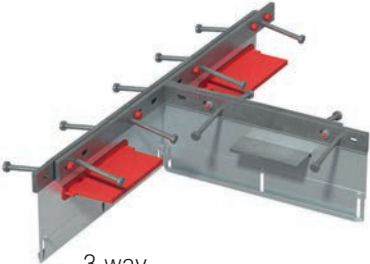

3-way Intersection

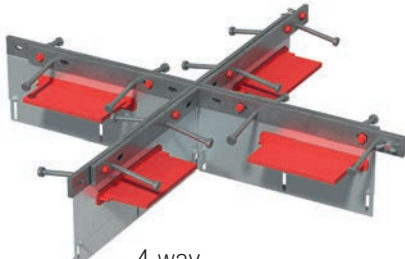

4-way Intersection

Return on email to: info.uk@leviat.com
 Leviat, President Way, President Park, Sheffield, S4 7UR, UK
 Tel: +44 (0) 114 275 5224 Web: Iседio.com

